




Ezi INNOVATIVE BUILDING SOLUTIONS

# 5.5 EziWP - B100 BITULASTIC

HIGH PERFORMANCE BITUMINOUS  
WATERPROOF COATING

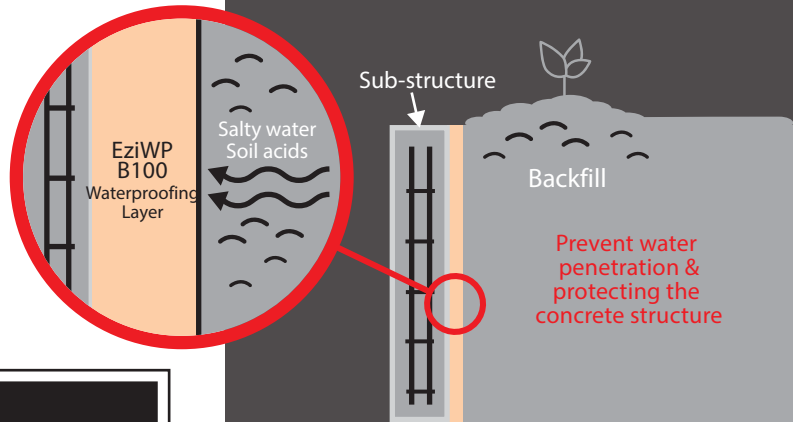

## PRODUCT INFORMATION

Product name	: EziWP - B100 BITULASTIC
Packing	: 5 kg and 20 kg
Shelf life	: 9 months
Storage condition	: Store in cool and dry condition
Appearance	: Black
Base	: Water - Base
Chemical content	: Bituminous

## APPLICATION DATA

Mixing ratio	: Use direct from the container (Note: Stir well before use)
Coverage	: Primer: Approx. 0.35kg/m <sup>2</sup> per coat (Diluted with 10% Water) Approx. 0.7 kg/m <sup>2</sup> per coat (Recommended 2 coats)
Waiting time between coat	: First Coat to Primer: 1 - 2 hours Second Coat to First Coat: 4 - 6 hours Final Coat to Reinforcement (Second Coat): 12 - 24 hours
Final Curing Time	: 2 - 4 days
Application temperature	: Substrate Temperature: 8 - 35°C Ambient Temperature: 8 - 35°C
Relative Humidity	: Maximum of 80%
Dew Point	: Surface temperature must be +3°C above dew point
Substrate	: No condensation or standing water on the substrate

## TECHNICAL DATA

Tensile Adhesion strength :	> 0.5 N/mm <sup>2</sup> <small>(28 days air dry ASTM D7234-12)</small>
Water Penetration :	Very low water permeability
Adhesion Performance :	Good
Crack Bridging :	Good
UV Resistant :	No
Weather Resistant :	No
Resistant to salty ground water :	Yes
Resistant to soil acid :	Yes

## DESCRIPTION :

EziWP - B100 BITULASTIC is a single component, high performance, elastic, modified bituminous waterproofing solution. Specially designed for a variety of application onto reinforced concrete structure to protect and prevent penetration of salty ground water & soil acids.

## KEY FEATURES :

- Eco-Friendly - Low VOC & Non-Toxic
- High bond strength for improved adhesion to a variety of well prepared substrates
- Single component solution that is user-friendly & eliminate site use error
- Affords protection to treated concrete slabs against soil acids & salty ground water
- Elastic properties for superior crack bridging

## KEY USAGE:

- Underground Structure
- Pile Cap
- Ground Beam
- Retaining Wall
- Lift pit
- RC Pipe
- Box Culvert
- Manhole
- Tunnel



## WORKING INSTRUCTION :

When working with EziWP B100 BITULASTIC it is highly recommended to follow the application method stated below:

### Surface Preparation :

- Surface must be dry, sound & free of contaminants eg. dust, laitance, oil, loose particles & friable sections.
- New concrete must be aged for at least 28 days; prior to application with Tensile Strength  $\geq 1.50 \text{ N/mm}^2$ .
- Old concrete that is wet or damp must have minimum 24 hours air drying (preferably longer where required).
- Substrate to receive EziWP B100 BITULASTIC must have sufficient gradient to avoid water ponding.
- Cement or mineral substrate must be mechanically prepared appropriately using abrasive blast cleaning or scarifying equipment to remove cement laitance & create an open texture.
- Loose, friable sections, blowholes or voids must be identified, removed or made good.
- Any surface protrusion that is more than 3mm must be removed or grinded off.

**Note :** Prior to application of EziWP B100 BITULASTIC all internal corners (angles), weak points and/or joints must be treated with Angle Fillet (Polyurethane Sealant or Latex Modified Cement-Sand Mortar), Joint Sealing Tapes, Non-Woven Polyester Fleece or Fiber Mesh; or any treatment deemed appropriate as per the manufacturer's recommendation. Kindly refer to work method statement for details.

### Mixing Method :

No mixing required, however stir well before use.

### Application Method :

For effective protection & waterproofing results a two (2) coat application is highly recommended on the well prepared substrate.

### Standard System :

- A Primer Coat ( $\sim 0.35\text{kg/m}^2$ ) with EziWP B100 BITULASTIC + 10% Water must be applied onto the substrate.
- Apply First Coat ( $\sim 0.70\text{kg/m}^2$ ) of EziWP B100 BITULASTIC; 1 - 2 hours after primer coat treatment.
- Apply Second Coat ( $\sim 0.70\text{kg/m}^2$ ) of EziWP B100 BITULASTIC; 4 - 6 hours after First Coat treatment.
- It is important to ensure that there are no bubbles, creases or pinholes.
- At joints between application overlap EziWP B100 BITULASTIC at junction with overlapping width of 100 - 150mm.
- The Second Coat must be applied from a right angle (or crosswise) direction onto the First Coat.
- It is important that the waterproof coating is applied consistently in terms of final coating thickness that are sufficient to eliminate pinholes or voids.
- Waterproof coating applied must be seamless; and that it is applied throughout the wall and/or floor areas (where applicable).

### Reinforced System :

- A Primer Coat ( $\sim 0.35\text{kg/m}^2$ ) with EziWP B100 BITULASTIC + 10% Water must be applied onto the substrate.
- Apply First Coat ( $\sim 0.70\text{kg/m}^2$ ) of EziWP B100 BITULASTIC; 1 - 2 hours after primer coat treatment.
- Apply Second Coat ( $\sim 0.70\text{kg/m}^2$ ) of EziWP B100 BITULASTIC; 4 - 6 hours after First Coat treatment.
- On the Second Coat apply Fiber Mesh or Non-Woven Polyester Fleece and roll it in; ensuring no bubbles or creases and overlap joints at 50mm width.
- Apply Final Coat ( $\sim 0.70\text{kg/m}^2$ ) of EziWP B100 BITULASTIC; 12 - 24 hours after Second Coat treatment.
- Ensure that the Final Coat is able to fully cover Fiber Mesh or Non-Woven Polyester Fleece; and that it is finished smooth.
- It is important to ensure that there are no bubbles, creases or pinholes.
- At joints between application overlap EziWP B100 BITULASTIC at junction with overlapping width of 100 - 150mm.
- The Second Coat must be applied from a right angle (or crosswise) direction onto the First Coat, and similarly for Final Coat over the Second Coat.
- It is important that the waterproof coating is applied consistently in terms of final coating thickness that are sufficient to eliminate pinholes or voids.
- Waterproof coating applied must be seamless; and that it is applied throughout the wall and/or floor areas (where applicable).

### Note :

- It is important to pay attention to all the details; prior to commencing application of waterproofing to the main vertical / horizontal areas as per the steps described above.
- Prior to application of subsequent layer; ensure that previous layers must be cured or tack free.
- All internal corners (angles), joints, weak points or critical areas must be treated with Angle Fillet (Polyurethane Sealant or Latex Modified Cement-Sand Mortar), Joint Sealing Tapes, Non-Woven Polyester Fleece or Fiber Mesh; or any treatment deemed appropriate as per the manufacturer's recommendation.
- The proposed waiting time between application of layers are based on 20 - 30°C at 50% relative humidity.

### Tools :

- Brush: Thick hair brush or Roller: Solvent resistant, short-piled lamb skin roller.
- Airless Spray Machine: Recommended for Standard System only. Apply a minimum of 2 layers in crosswise direction. Ideally the pump & sprayer should have the following specification: Minimum pressure @ 220 bar / min. output: 5.1 l/min; with minimum nozzle diameter of 0.83mm.

**Note :** Tools can be cleansed immediately after use using water. Hardened or cured materials can only be removed using mechanical means.

### WORKING PRECAUTION / LIMITATION :

- Never apply on substrates with rising moisture / dampness.
- Apply during reducing ambient and substrate temperature. Application during rising temperature may result in pinholes due to rising air. Avoid application under direct sunlight & during wet weather condition.
- Temperature must not drop below 8°C and Relative Humidity must not exceed 80% until the waterproof membrane had fully cured.
- Preceding coat must be thoroughly dry & free of pinholes; before applying subsequent coats.
- Avoid water ponding between coats on any horizontal surfaces or until the final coating has totally cured. Broom or mop surface water away.
- Not suitable for direct application onto insulation boards.
- After final coat treatment protect it for 48 hours and it should not be exposed for prolong period of time. Proper shelter must be provided for exterior application.
- Prior to back filling; it is recommended to protect the waterproofing membrane with polystyrene boards.
- Avoid application on dusty or friable substrate; until it is made good.

## MATERIAL SAFETY INFORMATION

**Product Name :** EziWP B100 BITULASTIC

### Manufacturer :

Ezi MOTARTECH SDN. BHD. (874800-D)

### Hazard Statement :

Causes skin and eyes irritation. May harmful if swallowed.

Warning

### Precautionary Statement :

Wash hands thoroughly after handling. Wear suitable protective clothing, glove and eye/face protection. If inhaled, immediately approach to fresh air. If in eyes, immediately flush eyes, including under eyelids with large amount of water. If ingestion, flush out mouth with water. If skin contact, remove contaminated clothing and wash the contaminated body part with mild soap & clean water.

When working with this product, recommended to follow the safety precaution below :



WEAR DUST MASK



WEAR SAFETY GOGGLES



WEAR HAND GLOVES



WEAR SAFETY SHOES



KEEP AWAY FROM CHILDREN

## COMPANY INFORMATION

**MANUFACTURED BY :** Ezi MOTARTECH SDN. BHD. (874800-D)

### FACTORY / WAREHOUSE

KL : 2, Jln. Tembaga SD5/2H, Bdr Sri Damansara, 52200, KL.  
PENANG : 1888, Jln. Lahar Bubu, Kepala Batas, 13200, Penang.  
PERAK : PT 990, 2 1/2 KM Off, Jln Simpang Pulau Lahat, 31300 Kampung Kepayang, Perak.

### SALES OFFICE

KL : Tel +603 6277 3709 Fax +603 6277 3760  
PG : Tel +604 659 9917 Fax +604 658 8818  
PR : Tel +605 357 5818 Fax +605 357 5818

### Ezi TECHNICAL ADVIORSY CENTRE

Tel : + 6012 431 8221

E-mail : [technical@ezi-fix.com](mailto:technical@ezi-fix.com)

Website : [www.ezi-fix.com](http://www.ezi-fix.com)